
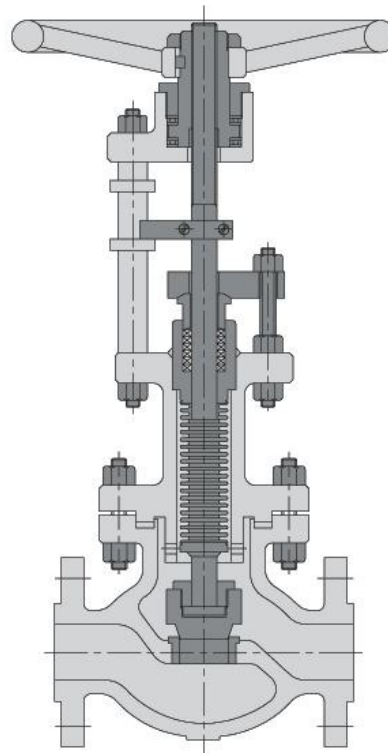


## SPECIAL "CHLORINE" BELLOW SEAL VALVE

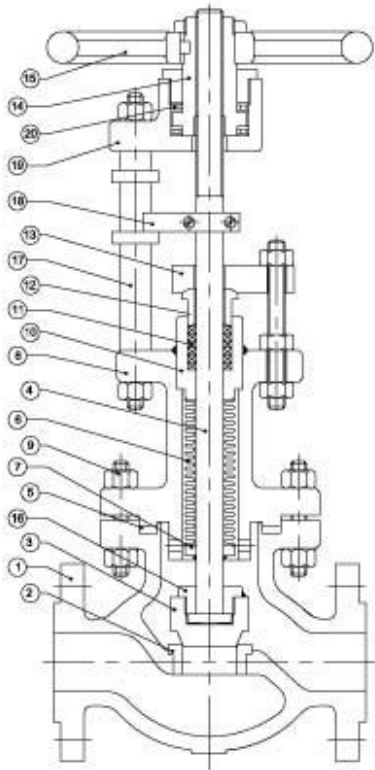

SR. No.	PARTS	MATERIAL
1.	BODY	A-352 Gr. LCB / LCC
2.	SEAT RING	MONEL / AISI-316 / HASTELLOY-C
3.	PLUG	MONEL / AISI-316 / HASTELLOY-C
4.	STEM	MONEL / HASTELLOY-C
5.	GASKET	SPIRAL WOUND (MONEL + PTFE)
6.	BELLOW	HASTELLOY-C-276
7.	BELLOW COLLAR	HASTELLOY-C
8.	BONNET	A-352 Gr. LCB / LCC
9.	FASTENERS	A-193 Gr.B8 / A-194 Gr. 8
10.	STUFFING BOX	HASTELLOY-C-276
11.	GLAND PACKING	PTFE
12.	GLAND BUSH	HASTELLOY-C-276
13.	GLAND FLANGE	AISI-304 / 316
14.	YOKE SLEEVE	Ni.RESIST
15.	HAND WHEEL	C.S. FABRICATED
16.	STEM NUT	MONEL / AISI-316 / HASTELLOY-C
17.	PILLAR	AISI-304 / 316
18.	GUIDE PLATE	AISI-304/316
19.	YOKE	A-352 Gr. LCB / LCC
20.	BEARING	STD.

### TECHNICAL DATA

- ☛ Valve Designed to BS - 1873/EUROCHLOR
- ☛ Valve Tested to API - 598 / BS - 5146
- ☛ Flanged Ends as per ANSI -B- 16.5
- ☛ Face to Face as per ANSI -B- 16.10

### ACCESSORIES

- ☛ Pneumatic Actuators
- ☛ Electric Actuators
- ☛ Floor Columns
- ☛ By-Pass Piping

### NOTES :

- ☛ Optional Stellite Plug & Seat

### DIMENSIONS :

VALVE SIZES ( INCH )		15	20	25	40	50	65	80	100	150	200	250	300	350	400
FACE TO FACE	150 #	108	118	127	165	203	216	241	292	406	495	622	699	787	914
	300 #	153	178	203	229	267	292	318	356	445	559	622	711	838	965
FLANGE DIA.	150 #	89	98	108	127	152	178	191	229	279	343	406	483	533	597
	300 #	92	118	124	156	165	191	210	254	318	381	445	521	584	648
RAISED FACE DIA.	150 #	35	43	51	73	92	105	127	157	216	270	324	381	413	470
	300 #	35	43	51	73	92	105	127	157	216	270	324	382	413	470
FLANGE PCD.	150 #	60	70	79	98	121	140	152	191	241	298	362	432	476	540
	300 #	67	83	89	114	127	149	168	200	270	330	387	451	514	572
FLANGE THK.	150 #	11	13	14	18	19	22	24	24	25	29	30	32	35	67
	300 #	14	16	18	21	22	25	29	32	37	41	48	51	54	57
RAISED FACE THK.	150 #	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6
	300 #	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6	1,6
No. OF HOLES/ DIA.	150 #	4/16	4/16	4/16	4/16	4/19	4/19	4/19	8/19	8/22	8/22	12/25	12/25	12/29	16/29
	300 #	4/16	4/19	4/19	4/22	8/19	8/22	8/22	8/22	12/22	12/25	16/29	16/32	20/32	20/32